



水務署
Water Supplies Department

香港灣仔告士打道七號入境事務大樓
Immigration Tower, 7 Gloucester Road, Hong Kong.

電子郵件
e-mail wsdinfo@wsd.gov.hk

電話
Telephone 2829 4367

圖文傳真
Facsimile 2824 0578

檔號
Reference (92) in WSD/K/3307/6/83

致：所有持牌水喉匠及認可人士

水務署通函第1/2008號
修訂對持牌水喉匠在進行喉管工程時
出錯而採取的罰分制度

由二零零八年七月十日起，以下的更改事項便告生效。

WWO 1008款表格內有三個項目的說明將會修改/增訂如下：-

項目	部份	現有說明	修訂說明	扣分
(i)	錶位		建築地盤錶房 或錶箱不設在 圍板凹處	3
(ii)	其他) 未安裝虹吸 沖廁水箱) 水喉工程規 格未依批准 安裝	未安裝已認可的沖廁 設備 水喉工程規格未依批 准安裝，有別於圖則 編號：_____。 關於： <input type="checkbox"/> 喉管路線 <input type="checkbox"/> 尺寸 <input type="checkbox"/> 裝置數目 <input type="checkbox"/> 裝置位置大幅改變 <input type="checkbox"/> 位置名稱（扣3分） <input type="checkbox"/> 其他列明如下：__	3 */5
(iii)	註		* 除位置名稱扣3分 外，其他都扣5分。	


現夾附更新的 WWO 1008 款表格副本一份給閣下參閱。

如有任何疑問，請致電本署工程師歐偉雄先生(電話：2829 4453)。

水務監督

(錢柱森

代行)

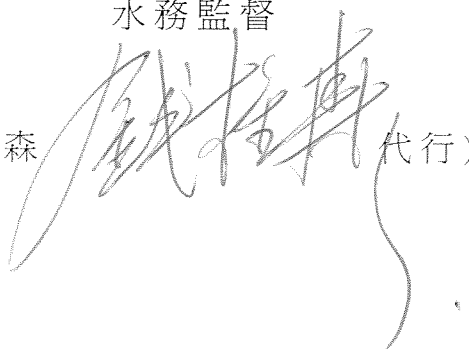

二零零八年六月二十七日

副本交送：

房屋署

屋宇署

建築署

消防署

香港房屋協會

香港建築師學會

香港工程師學會

香港測量師學會

香港水務渠務聯會有限公司

WSD 3318/15/81/ Pt. 2

香港水務學會

香港水喉潔具業商會有限公司

香港持牌水喉匠協會有限公司

香港喉管從業員總會

香港水務專業協會有限公司

香港給排水學會有限公司

香港註冊消防工程公司商會有限公司

香港物業管理公司協會有限公司

			消防	食水	鹹水	扣分	備註
			Fire service	Fresh water	Salt	Penalty point	Remarks
Connection 總喉	laid to wrong position	位置不當				2	
	not exposed	未有外露				2	
	undersized/oversized	太小/太大				2	
	no temporary connection as required	未依規定設臨時供水喉叁				2	
Piping 水喉	sub-standard	不合標準				5	
	no stopcocks at appliances & branches	支喉未裝有水掣				2	
	not bitumen painted & hessian wrapped	未塗上瀝青及纏上麻布				2	
	excessive elbows used	使用太多曲尺喉				1	
	Concealed prior to inspection	在視察前將藏牆喉掩蓋				5	
	not securely fixed	安裝不穩固				1	
	of material not suitable	喉料不適當				3	
Meter Position/ Check Meter Position 錶位	not properly provided/indicated	錶位不適當/沒有明確指示				4/1	
	meter room / box not located at the hoarding recess area of the construction site	建築地盤錶房或錶箱不設在圍板凹處				3	
	no loose jumper stopcock at inlet	入水處缺少皮心掣				3	
	too close to wall	太接近牆身				1	
	no non-return valve	缺少逆止閘掣				1	
	no gate valve	缺閘掣				1	
Storage Tanks 儲水箱	of material not acceptable	材料不合規格				3	
	no control valve at inlet/outlet	入水/出水處缺少水掣				2	
	no washout provided	缺少水箱去水喉				2	
	no overflow provided	缺少滿溢喉				3	
	overflow undersized	滿溢喉太少				2	
	overflow above inlet	滿溢喉高過入水喉				2	
	overflow does not discharge into conspicuous position	滿溢喉未有引至明顯地方				3	
	tank not accessible	缺乏視察通道				1	
	tank not provided with closed-fitting covers	缺乏緊密箱蓋				2	
	storage excessive	容量過大				1	
	no gap between potable & non-potable tanks	食水箱與非食水箱間缺乏適當隔離				3	
	inlet incorrectly laid/sized	入水喉位置/尺寸不當				1	
	outlet incorrectly laid/sized	出水喉位置/尺寸不當				1	
	Others 其他	sanitary fittings incomplete	潔具未安裝完備				2
plumbing incomplete		水喉工程未安裝完備				5	
approved type flushing apparatus not provided		未安裝已認可的沖廁設備				3	
heater not properly installed		熱水器未有安裝妥當				2	
no proper meter box provided		缺乏適當水錶箱				1	
no locking device for tap		龍頭未上鎖				1	
plumbing arrangement not as approved on Drawing No(s): _____ with respect to: <input type="checkbox"/> alignment <input type="checkbox"/> size <input type="checkbox"/> number of installation <input type="checkbox"/> substantial change in installation location <input type="checkbox"/> naming of location (3marks) <input type="checkbox"/> others as stated:		水喉工程規格未依批准安裝，有別於圖則編號：_____ 關於： <input type="checkbox"/> 喉管路線 <input type="checkbox"/> 尺寸 <input type="checkbox"/> 裝置數目 <input type="checkbox"/> 裝置位置大幅改變 <input type="checkbox"/> 位置名稱（扣3分） <input type="checkbox"/> 其他列明如下：_____				3/5	
fittings and pipes not as reported on schedule attached to Form Ga		水喉配件及水喉與「Ga」款表格附表上所報不符				3	