

225 x 50 x 5 THK.-
G.M.S. HOLDFASTS
(FOR BRICK WALL)

—M8 ANCHOR BOLTS
(FOR R.C. WALL/
COLUMN)

- LOCK

150 x 50 THK. H.W.
INTERMEDIATE RAIL

150 x 50 THK. H.W. STILES

— 3 NOS. S.S. BUTT
HINGES WITH
S.S. WASHERS

FINISHED
FLOOR LEVEL

DOWEL BAR

DOWEL BAR

ELEVATION

DOOR PANEL WIDTH = W

SECTIONAL PLAN

B	RE-FORMATTED TO CSWP	W.K. CHIU	18/7/03
A	GENERAL REVISION	W.K. CHIU	10/10/00
REF.	REVISION	APPROVED	DATE



SINGLE-LEAF SOLID CORE
TIMBER DOOR



水務署
Water Supplies Department

APPROVED	G.C. LEE AD/NW	DRAWING NO. WSD 2.13B (SHEET 1 OF 4)	CSWP
DATE	9/6/92		
SCALE	1 : 10		

Cad Ref. : WSD021302-B.dwg

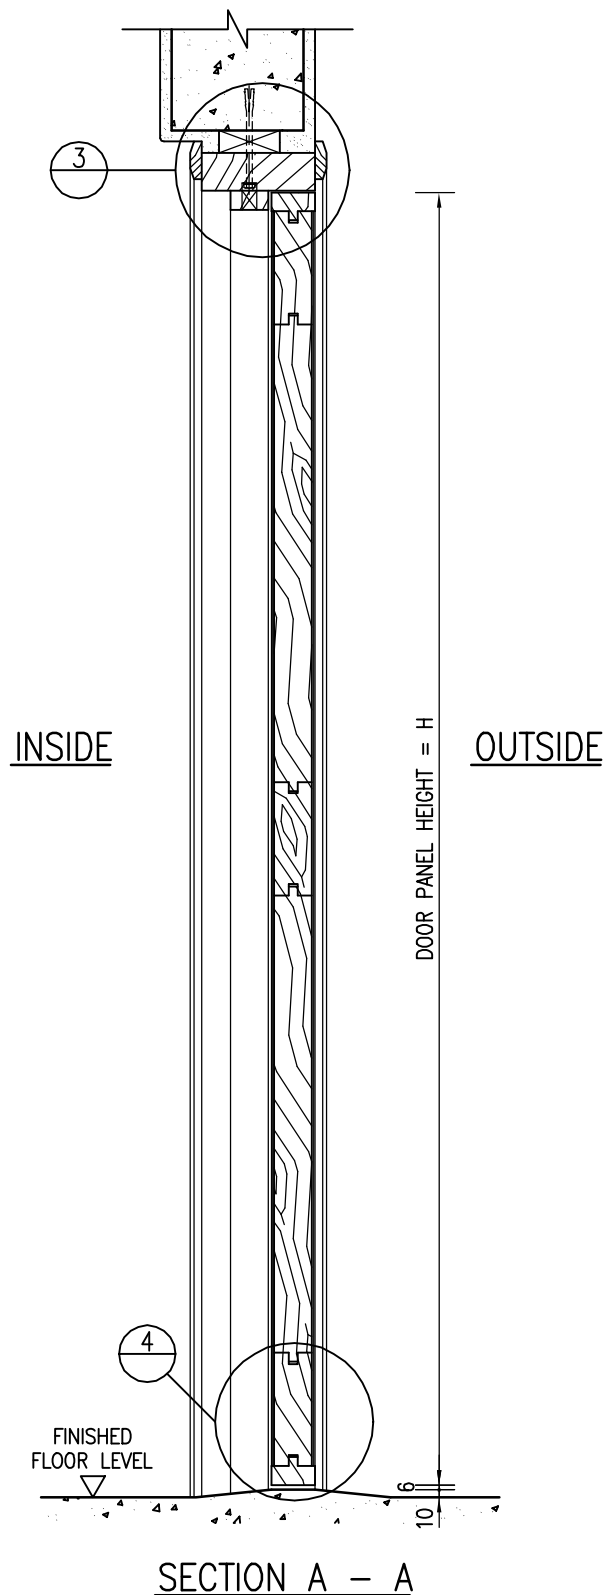

SINGLE-LEAF SOLID CORE
TIMBER DOOR



水務署
Water Supplies Department

APPROVED

G.C. LEE
AD/NW

DATE

9/6/92

SCALE

1 : 10


DRAWING NO.

WSD 2.13B


(SHEET 2 OF 4)

CSWP


Cad Ref. : WSD021303-B.dwg

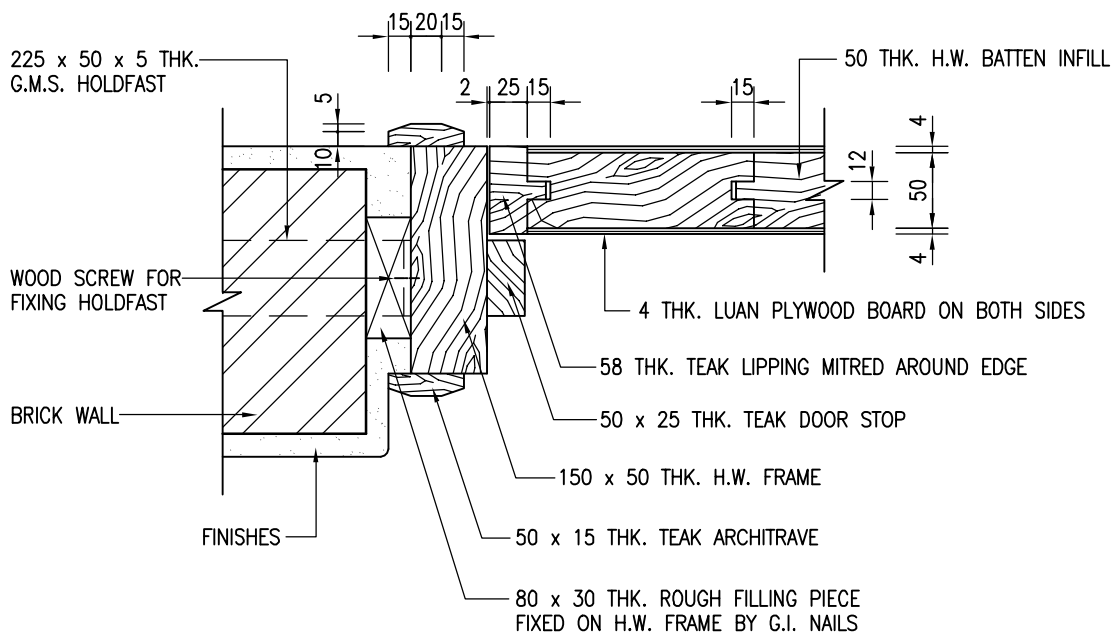

DETAIL '1'

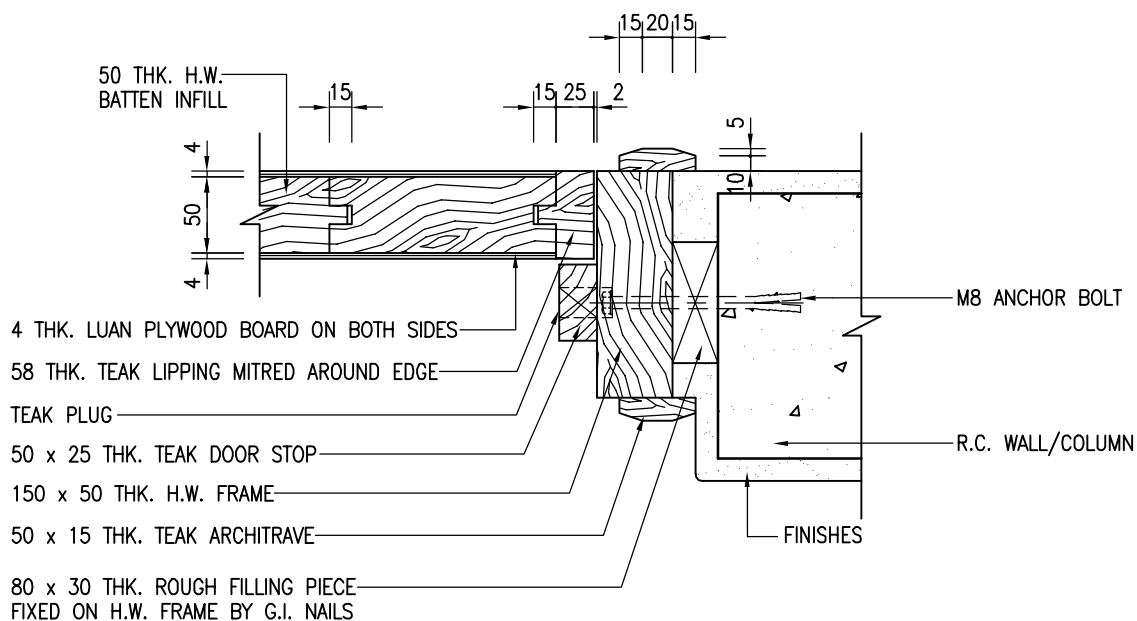

DETAIL '2'



SINGLE-LEAF SOLID CORE
TIMBER DOOR



水務署
Water Supplies Department

APPROVED

G.C. LEE
AD/NW

DATE

9/6/92

SCALE


1 : 5

DRAWING NO.

WSD 2.13B


(SHEET 3 OF 4)

CSWP

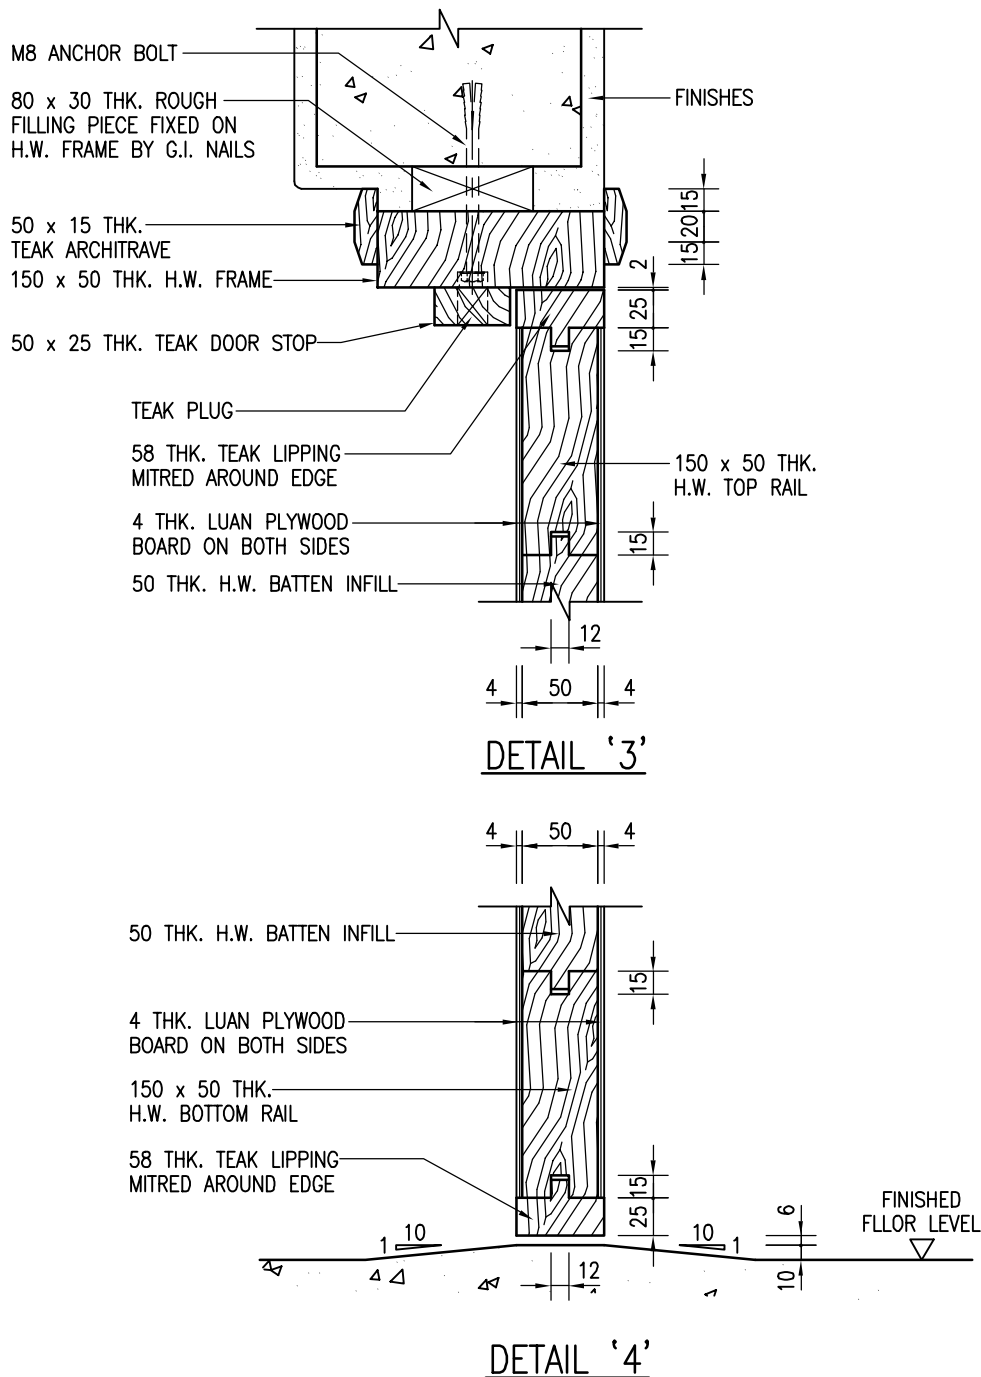

NOTES :

1. ALL DIMENSIONS ARE IN MILLIMETRES.
2. OVERALL DIMENSIONS (W x H) OF DOOR PANEL SHALL BE AS SCHEDULED ON CONTRACT DRAWINGS.
3. UNLESS OTHERWISE SPECIFIED IN THE DOOR SCHEDULE, LOCK SET FOR DOORS SHALL BE LEVER HANDLE MORTISE TYPE OF APPROVED MANUFACTURE.
4. POSITION OF SELF-CLOSING DEVICE IF SPECIFIED IS DETERMINED ON SITE.
5. DOOR FRAME FIXING DETAILS SHALL VARY ACCORDING TO THE MATERIAL FORMING STRUCTURAL OPENING OF THE DOOR.



SINGLE-LEAF SOLID CORE
 TIMBER DOOR



水務署
 Water Supplies Department

APPROVED

G.C. LEE
 AD/NW

DATE

9/6/92

SCALE

1 : 5

DRAWING NO.

WSD 2.13B

(SHEET 4 OF 4)

CSWP